


Sharp

SHARP G-SERIES ENGINE LATHES

G1660/G1860/G2060

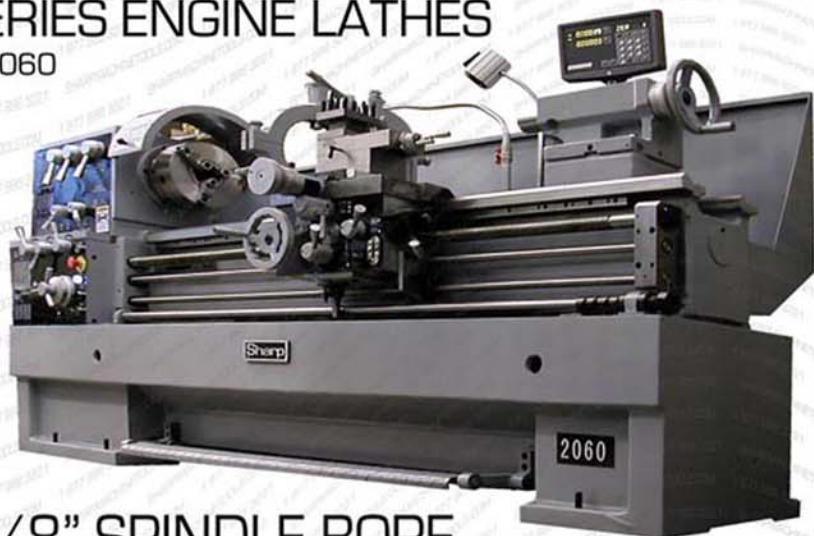

7.5HP 31/8" SPINDLE BORE

MODEL	G1660/G1860/G2060
Max. swing over bed	16"/18"/20"
Max. swing over carriage	10.6"/11.6"/12.6"
Max. swing in gap	26.9"/27.9"/28.9"
Center distance	60"
Width of bed	300mm
Spindle nose	D1-8
Spindle bore dia	82mm (3.125")
Spindle taper	M7
Spindle speed(rpm)	16-1600,12speeds
Inch thread range	2-56TPI
Metric thread range	0.5-14mm
Longitudinal feed range	0.06-0.82[0.002-0.032"/r][mm/rev]
Cross feed range	0.017-0.242[0.0007-0.0095"/r][mm/rev]
Leadscrew dia	36mm
Leadscrew pitch	4TPI
Taper of tailstock quill	M4
Travel of tailstock quill	127mm(5")
Diameter in tailstock quill	60mm
Main motor power	7.5HP
Coolant pump motor power	90W
Overall dimensions(LxWxH)	2742x1010x1280mm
Packing dimensions(LxWxH)	3200x1360x2000mm
Net weight	1660kg
	2040kg
	2250kg